TAPERED ALUMINUM FRAME

INSERT STYLE:	INSERT COLOR:		PART NUMBER:

NO.	REVISION	DATE	BY

NO.	F&F RELEASE	DATE	BY

EXTERIOR CARPET G4EC 19C005XXX | HEAVY-DUTY CARPET G4HC 19C010XXX | CARPET G4CP 19C008XXX | VINYL G4V 19V002XXX | VINYL-ABRASIVE G4VA 19A003XXX | SERRATED ALUM. INSERT G4SAI 19A001XXX | POURED ABRASIVE INSERT G4PA 19M002XXX | SERRATED ALUMINUM G7 16A056000

INSERT STYLES

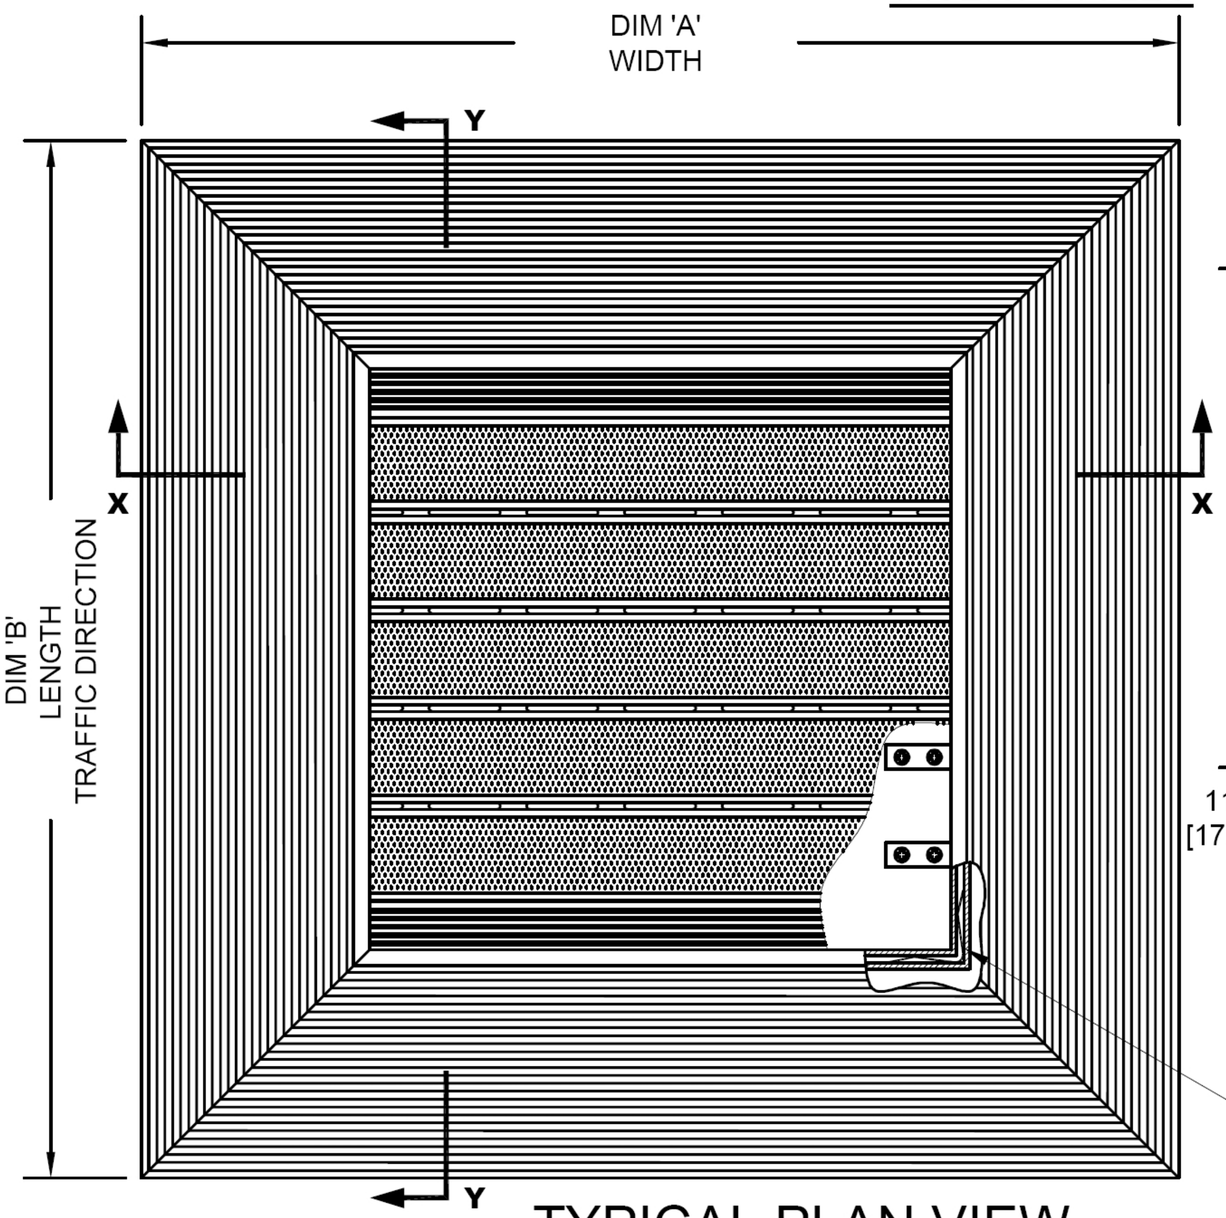

TYPICAL PLAN VIEW

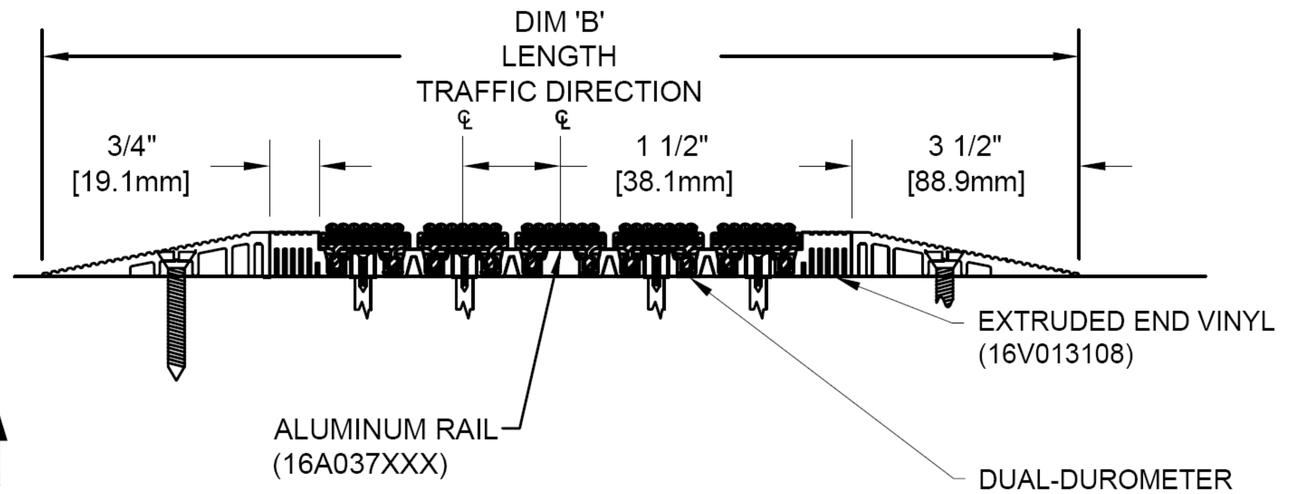

SECTION Y-Y

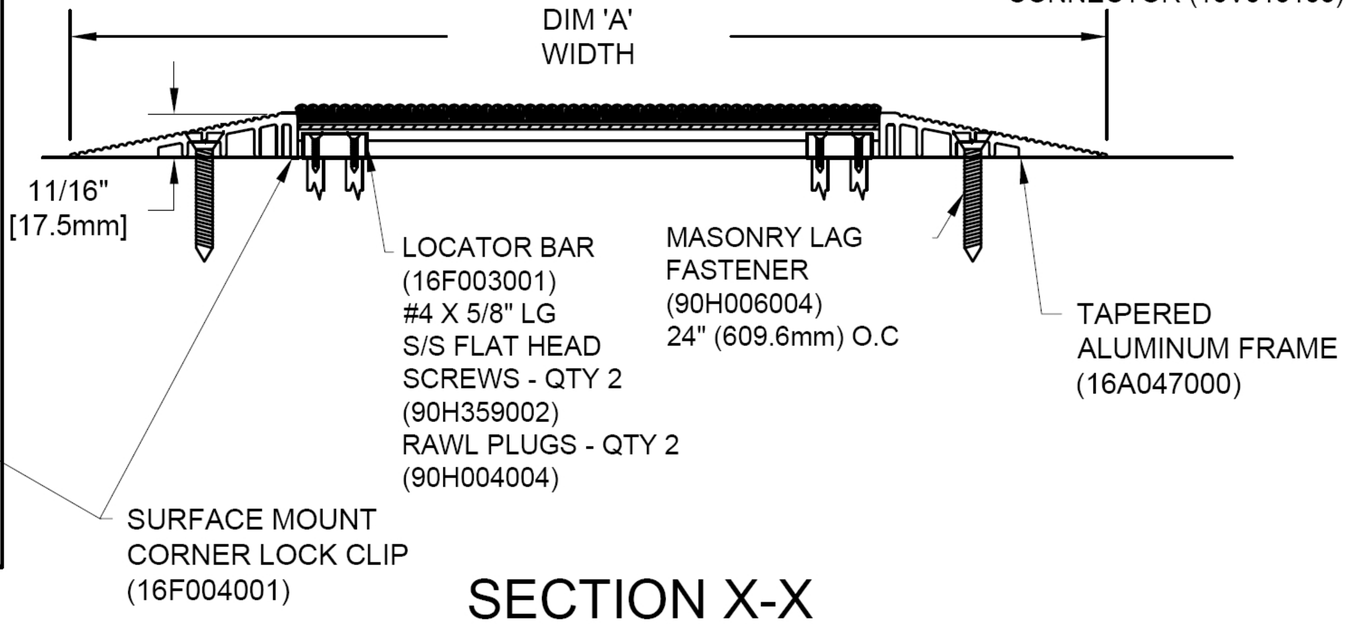

SECTION X-X

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

*PLEASE VERIFY TRAFFIC DIRECTION

*GRILLE MATSHALL BE ABLE TO SUPPORT A 1000 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMODATED. CONTACT SALES WITH SPECIFIC LOADING REQUIREMENTS.

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A")

*DUE TO 1-1/2" MODULE OF GRILLE MAT INSIDE OF FRAME DIMENSION SHOULD BE CHANGED ONLY IN INCREMENTS OF 1-1/2" [38.10mm] TO AVOID THE USE OF EXTRUDED END VINYLS.

*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST AMERICAN FLOOR MATS INFO PACKET AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)

AMERICAN FLOOR MATS walk well

PLEASE VERIFY ALL

QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' TRAFFIC DIR	FINISH	NOTES

AMERICAN FLOOR MATS, INC.

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: