


## Electrically Conductive Interlocking Drainage Mats Specification Sheet

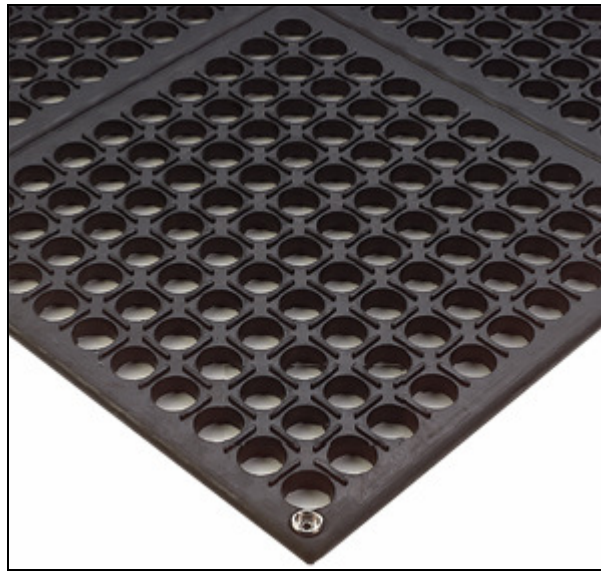

<b>Performance</b>	Better
<b>Uses</b>	Dry areas at risk for damage from static electricity
<b>Compound</b>	Natural Rubber
<b>Coefficient of Friction</b>	0.65 / 0.75 Dry per ASTM F1677
<b>Tabor Abrasion</b>	1% lost @ 1,000 cycles per Fed. Std. 191
<b>Flammability</b>	"A" Rating per MVSS 302
<b>Warranty</b>	1 year
<b>Anti-Fatigue Value</b>	4
<b>Slip Resistance</b>	4
<b>Conductivity</b>	4
<b>Thickness</b>	1/2"
<b>Resistivity</b>	RTT: $1 \times 10^4$ to $8 \times 10^6$ Ohms