


## ElectroSoft Static Dissipative Mats

### Specification Sheet

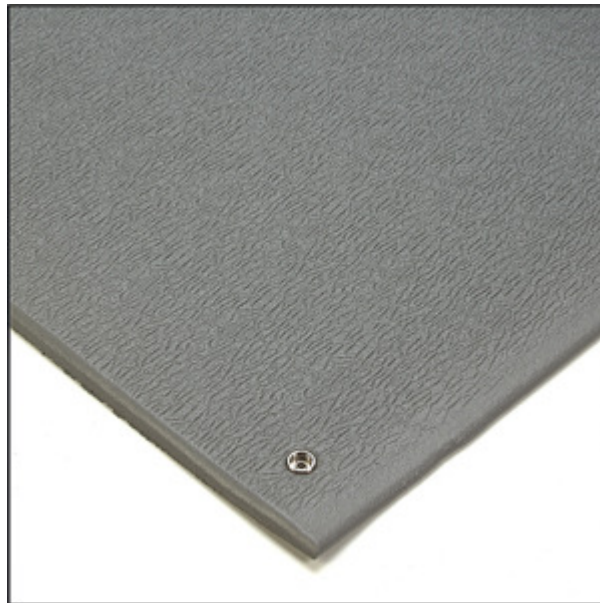

<b>Performance</b>	Better
<b>Uses</b>	Dry areas at risk for damage from static electricity
<b>Compound</b>	Vinyl
<b>Coefficient of Friction</b>	0.88 Dry per ASTM F1677
<b>Tabor Abrasion</b>	3% lost @ 1,000 cycles per Fed. Std. 191
<b>Flammability</b>	"A" Rating per MVSS 302
<b>Warranty</b>	1 years
<b>Anti-Fatigue Value</b>	3.5
<b>Wear Resistance</b>	2
<b>Conductivity</b>	2
<b>MNF</b>	70
<b>Thickness</b>	3/8"
<b>Resistivity</b>	RTT: $1 \times 10^9$ to $9 \times 10^9$ Ohms