


Nautilus Recessed Matting: Specification Sheet

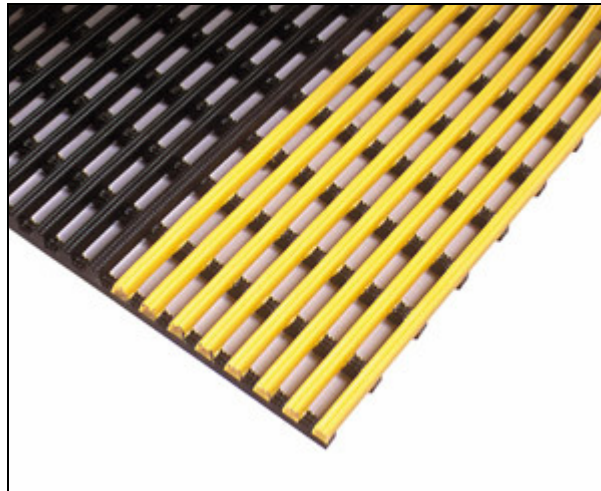

Performance	Best
Uses	Recessed Areas with Excessive Moisture
Compound	PVC Vinyl with Saw-Tooth Top Surface
Coefficient of Friction	0.69 Dry / 0.55 Wet per ASTM F1677
Compression Deflection	0.089" (40 lbs/sq. inch) per ASTM C1028-96
Abrasion Resistance	1.91 Grams per ASTM D3884-01
Breaking Load / Elongation	Breaking Load - 100.25 lbs/in ² Elongation - 184.14% per ASTM D-412
Surface Flammability	Pass per ASTM D-2859/CPSC FF-170
Warranty	2 years
Elongation	N / A per ASTM D412
Thickness	1/2"
Custom Sizes	Available in 2', 3' and 4' Widths

Item No: RNRA