


Static Dissipative Anti-Fatigue Mats

Specification Sheet



Performance	Best
Uses	Dry areas at risk for damage from ESD static electricity
Compound	Vinyl
Coefficient of Friction	0.79 Dry per ASTM F1677
Tabor Abrasion	<1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	3 years
Anti-Fatigue Value	4.5
Wear Resistance	4.5
Conductivity	3
Insulative Level	3
MNF	70
Thickness	1/2"
Resistivity	RTT: 5×10^7 to 8×10^8 Ohms
Compression	0.343 inches @ 35 PSI per ASTM D575 (Standard); 1 inch @ 35 PSI per ASTM D575 (UltraSoft)

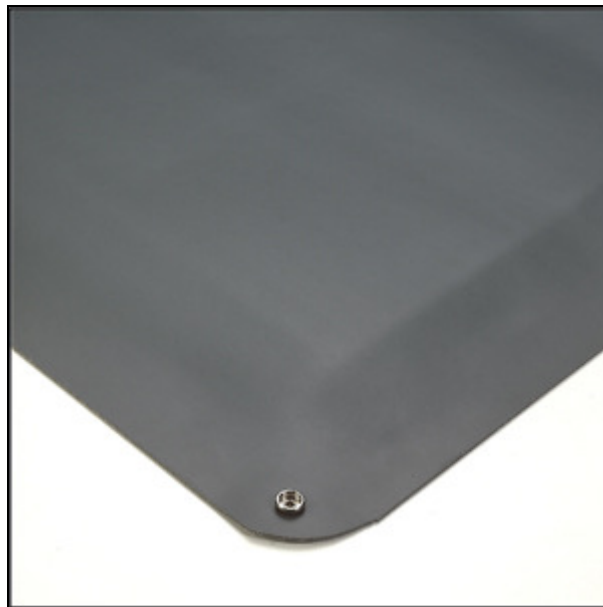