


Premium Clear Vinyl Runner Mats

Specification Sheet

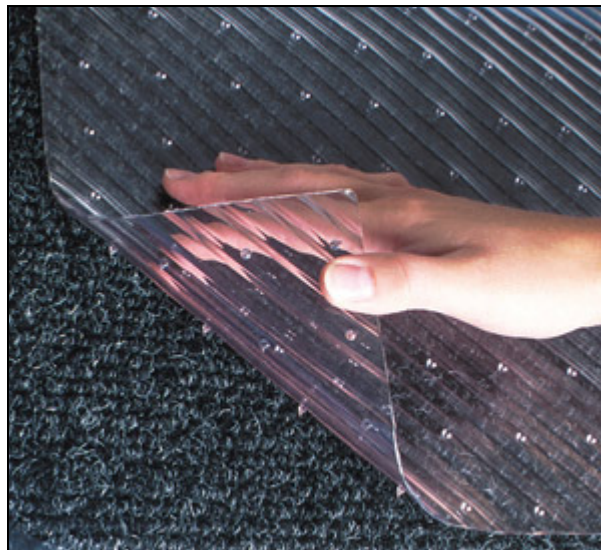

Performance	Good
Uses	Carpeted Floor Protection for Foot Traffic
Compound	Flexible 1/8" PVC
Coefficient of Friction	0.90 Dry / 0.28 Wet per ASTM C1028-96
Tabor Abrasion	1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 year
Tensile Strength	1000 lbs. per sq. inch per ASTM D412
Wear Resistance	★★★★★
Slip Resistance	★★★★★

Rigid Clear Vinyl Runner Mats

Specification Sheet



Performance	Very Good
Uses	Carpeted Floor Protection for Foot & Cart Traffic
Compound	Hard 1/8" PVC
Coefficient of Friction	0.90 Dry / 0.28 Wet per ASTM C1028-96
Tabor Abrasion	1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 year
Tensile Strength	1200 lbs. per sq. inch per ASTM D412
Wear Resistance	★★★★★
Slip Resistance	★★★★☆