


Cushion Ridge Recessed Mats

Specification Sheet

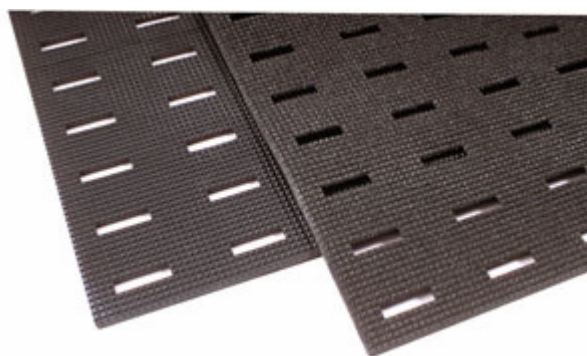

Performance	Good
Uses	Universal Indoor/Outdoor Applications
Compound	7/16" Thick Vinyl
Coefficient of Friction	0.70 Dry / 0.67 Wet per ASTM F1677
Tabor Abrasion	< 1% lost @ 1,000 cycles per Fed. Std. 191
Critical Radiant Flux	0.41 watts/square cm
Warranty	1 year
Compression Deflection	0.093" (40 lbs/sq. inch) per ASTM D575
Tensile Strength	1000 lbs. per sq. inch per ASTM D412
Abrasion Resistance	2.29 Grams