


Electrically Conductive Interlocking Mats

Specification Sheet

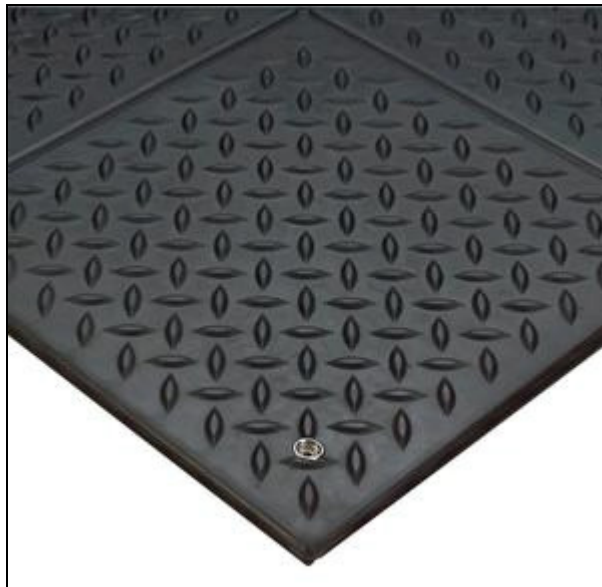

Performance	Better
Uses	Dry areas at risk for damage from static electricity
Compound	Natural Rubber
Coefficient of Friction	0.69 / 0.80 Dry per ASTM F1677
Tabor Abrasion	1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 year
Anti-Fatigue Value	4 out of 5
Slip Resistance	4.5 out of 5
Conductivity	4 out of 5
Thickness	1/2"
Resistivity	RTT: 3×10^4 to 5×10^5 Ohms