


Corrugated Rubber Runner Mats

Specification Sheet

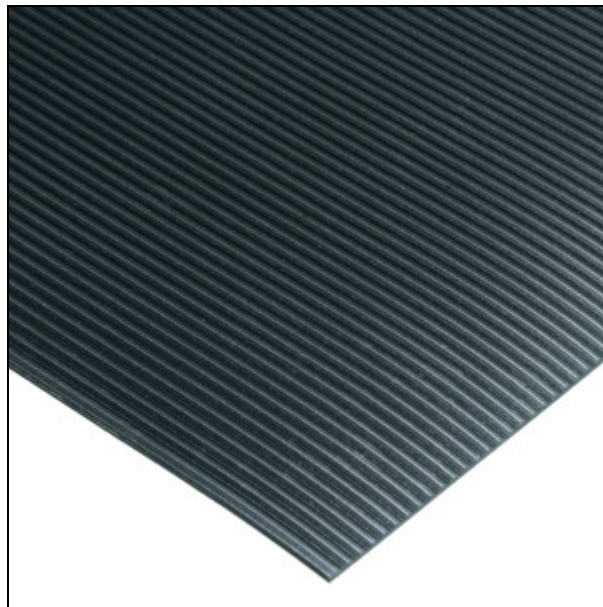

Performance	Best
Uses	Indoor / Outdoor Applications
Compound	100% Nitrile Rubber
Coefficient of Friction	0.88 Dry / 0.70 Wet per ASTM F1677
Tabor Abrasion	< 1% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 years
Tensile Strength	1100 lbs. per sq. inch per ASTM D412
Weight	1.7 Lbs / SF
Wear Resistance	5+
Slip Resistance	5+